


NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS:
 - 1.1 FREQUENCY RANGE: DC to 26.5 GHz
 - 1.2 MAXIMUM INPUT POWER: 0.5 WATTS @ +25°C
DERATED LINEARLY TO 0 WATTS @ +125°C
 - 1.3 OPERATING TEMP. RANGE: -55°C to +125°C
 - 1.4 IMPEDANCE: 50 OHMS
 - 1.5 VSWR (MAX.):
DC to 18.0 GHz: 1.05 + 0.008f(GHz)
18.0 to 26.5 GHz: 1.30:1
- 2.0 DIMENSIONS IN PARENTHESIS ARE IN MILLIMETERS.
- 3.0 MARKING: MARK UNIT AS SHOWN
(REF.: INK-09035-27-03)

MARK THIS SURFACE

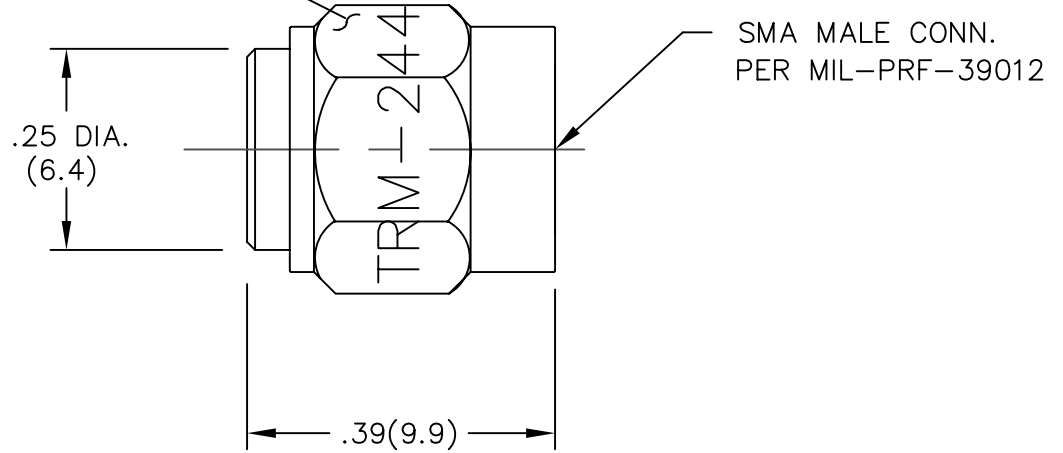

MODEL NUMBER
TRM-2443-M0-SMA-02

REV.	DESCRIPTION	DATE
-	RELEASED	3/10/94
A	ECN 14170	12/19/94
A1	ADDED TITLEBLOCK	11/15/05

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Emerson Network Power.		CAGE CODE 34078	MIDWEST MICROWAVE	
UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE: 3 PLACE DECIMALS ±.005 2 PLACE DECIMALS ±.02 FRACTIONS ±1/64 PARALLELITY: T.I.R. _____ FLATNESS: T.I.R. _____ CONCENTRICITY: T.I.R. _____ ANGLES AND PERPENDICULARITY: ±1'				TITLE TERMINATION OUTLINE DRAWING
DRAWN/DATE A.BEATTY 2/7/94	ENG./DATE G.KOZAK 3/9/94	DRAWING NUMBER TRM-2443-M0-SMA-02-01		REV. A1
CHECKED/DATE M.HOLLMAN 3/8/94	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1	